

# Roof Mount CNG Fuel Systems for Refuse



**Lightweight  
Long Range  
Durable & Safe**

## Features and Benefits



### Design

Mounted on roof of body. Integrated steel panels and a chamfered design to protect from branch strikes; cover designed to prevent branch intrusions. Bottom cover included on Front end loaders to protect underside of system



### Lightweight

Lightweight TUFFSHELL® all-composite Type 4 cylinders combined with aluminum construction minimizes system weight allowing you to maximize payload



### Performance

Box Fuel Management Module (FMM) with optional Blue iQ® Smart Gauge and extended range Marathon™ Regulator



### Durable

Powder coated steel and aluminum structure with bolted construction for serviceability. Cylinders designed for 20 year service life



### Plumbing optimized for high fuel flow

CNC formed stainless high pressure and vent lines designed to significantly reduce leak points and ease installation



### Backed by warranty

1-year warranty. Optional extended warranties



### Safe

Pressure Relief Device (PRD) for improved thermal protection. Patented Drive-Away-Protection prevents engine ignition when fill panel door is not secured. Safe defueling for maintenance




### Easy to install and service

Easy access to system for inspection. Tool-free access to defuel valve. Optional defueling hose 25- or 50-foot lengths for truck to truck fueling

# Fuel Management Module

- No disassembly or removal of components needed to install the system
- Standard NGV1 P36 and P36HD fueling receptacles
- Standard defueling circuit
- Remote fill ports that utilize the internal check valve (no need for adding additional check valves)
- Internally manifolded plumbing
- Glycerin filled high and low pressure fuel gauges
- 75 SCFM high pressure coalescing filter
- Powder coated aluminum exterior and coated hardware for corrosion resistance
- Plug and play electrical interfaces with CNG-prepped OEM chassis
- Coolant loop that will not interfere with OEM heating system
- Available with optional Blue iQ® and Marathon™ Regulator

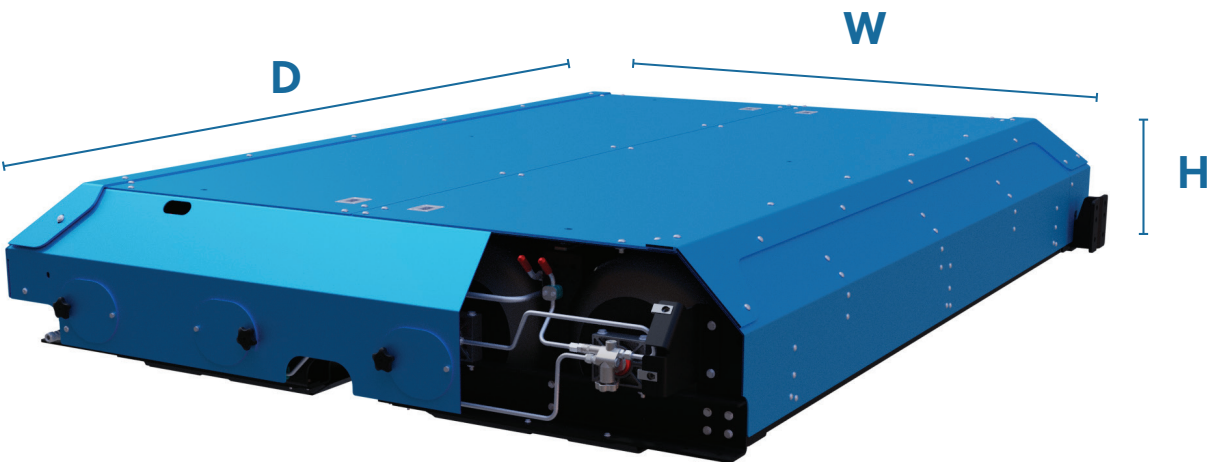

## Specifications

		20536000	20535000	20537000
Number of Cylinders	each	4	4	4
Capacity	DGE	60	75	92
Water Volume	L	800	1,000	1,234
Height	in	18	18	18
Width	in	77	77	77
Depth	in	98	109	128
Empty Weight	lb	1,003	1,237	1,469
Full Weight	lb	1,389	1,722	2,064

Technical Support, Training, Genuine Parts  
Call today 833-4-HEX-CARE

Service when and where you need it

hexagonagility.com | sales@hexagonagility.com | +1 949 236 5520